


# LDMC-945



*The MAL LDMC-945 is a simple indoor setup box for your dynamic digital signage or kiosk deployments. Its plug & play features is so easy to use, it seems like a DVD player that has a personal touch & extra features.*

*With its 9 preset templates you can insert pictures, movies and text into a thumb-drive and off you go.*

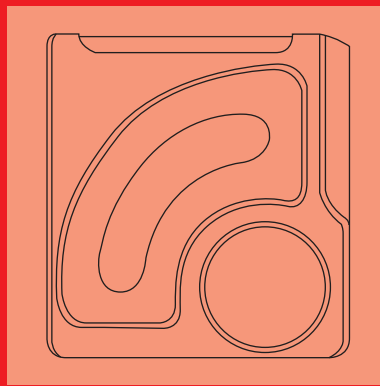

simple

## Digital Signage

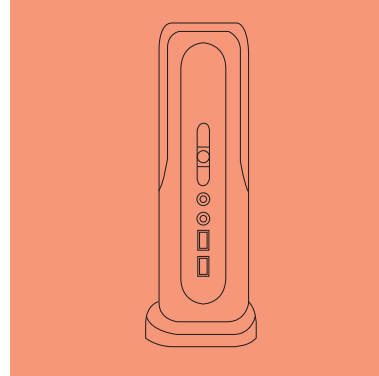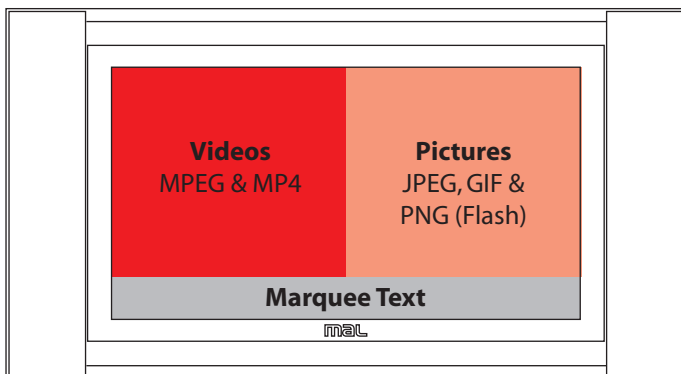

### Features

- Easy to use "User Administration"
- Portable and light weight.
- VGA output.
- 9 preset templates.
- Low heat dissipation.
- Comes with standee.

# LDMC-945

# simple

## System

|                   |   |
|-------------------|---|
| CPU               | Soldered-down Intel® Atom® processor 230 with a 533 MHz system bus  |
| FSB               | 533 MHz system bus  |
| BIOS              | Intel® BIOS (resident in the SPI Flash device)  |
| System Chipset    | Intel® 945GC Chipset  |
| System Memory     | 512MB DDR2 533 FSB RAM installed (max 2GB)  |
| Storage           | None  |
| HW Status Monitor | Monitoring System Temperature, voltage and cooling fan status, auto throttling control when CPU overheats |
| Expansion         | 1 x PCI Conventional bus connector  |
| GPIO              | On-board Programmable 8 bit digital I/O interface   |

## I/O

|                 |   |
|-----------------|---|
| MIO             | 1 x RS-232, 1 x K/B, 1 x Mouse  |
| IrDA            | Not available   |
| USB             | Six USB 2.0 ports   |
| Audio Interface | 4-channel (2+2) audio subsystem using the Realtek* ALC662 high definition audio codec |

## Display

|                   |  |
|-------------------|--|
| Chipset           | Intel® 82945GC Graphics Memory Controller Hub (GMCH) |
| Display Memory    | Intel® 82801GB I/O Controller Hub (ICH7)             |
| Video             | Intel® GMA950 onboard graphics subsystem             |
| VGA/LCD Interface | Intel Graphics Gen4 Media Accelerator DirectX* 9.0c  |
| DVI               | None   |

## Mechanical & Environmental

|                       |  |
|-----------------------|--|
| Max Power Consumption | 60 Watts   |
| Current               | 110/230 volts                                      |
| Operating Temperature | 0~65Celsius  |
| Operating Humidity    | 0%~90% relative humidity, non condensing           |
| Form Factor           | Mini-ITX, compatible with microATX (170mm x 170mm) |
| Weight (with PSU)     | TBA  |
| Packaged Size         | TBA  |
| Package Weight        | TBA  |

